






Simple, quick mounting

Step 1: Shorten the channel base unit with a hacksaw and the cutting aid, deburr cut surfaces, apply sealing caps and screw tight.

Step 2: Determine construction height, shorten adjustment piece and attach drain set and support feet.

Step 3: Position the shower channel, connect to the drain pipe and secure feet. Finished.



Secure sealing concept

A permanent and practical seal is the most important technical detail of a floor-level shower. With Advantix Vario, all of the materials required, such as special adhesive and sealing strip, are included in the scope of delivery.





Height adjustable grate

Using the adjustable grate holder, the grate height can be adjusted exactly to various tile heights from 5 to 20 mm. If thicker floor coverings, e.g. natural stone, are used, the standing grate can be adjusted by 15 to 30 mm with help of an accessory set.

Secure connection

Additional parts are available for corner, U-shaped or long variations. The interfaces, which touch the channels, have a special sealant on them, guaranteeing a permanent connection.

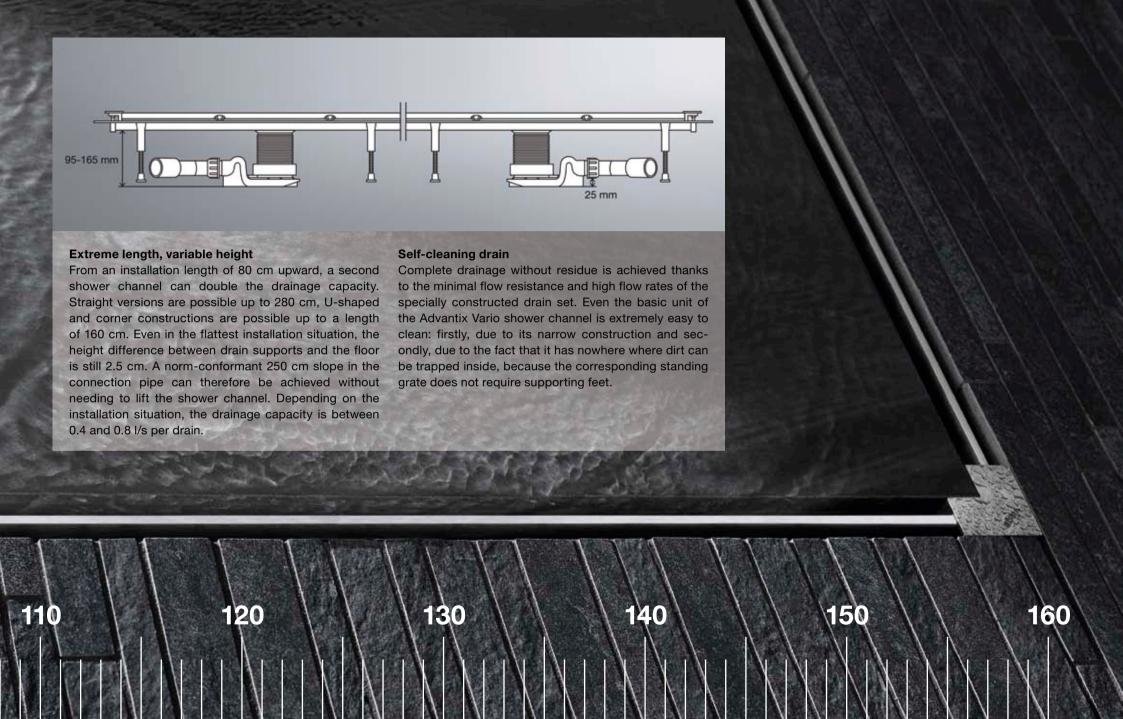

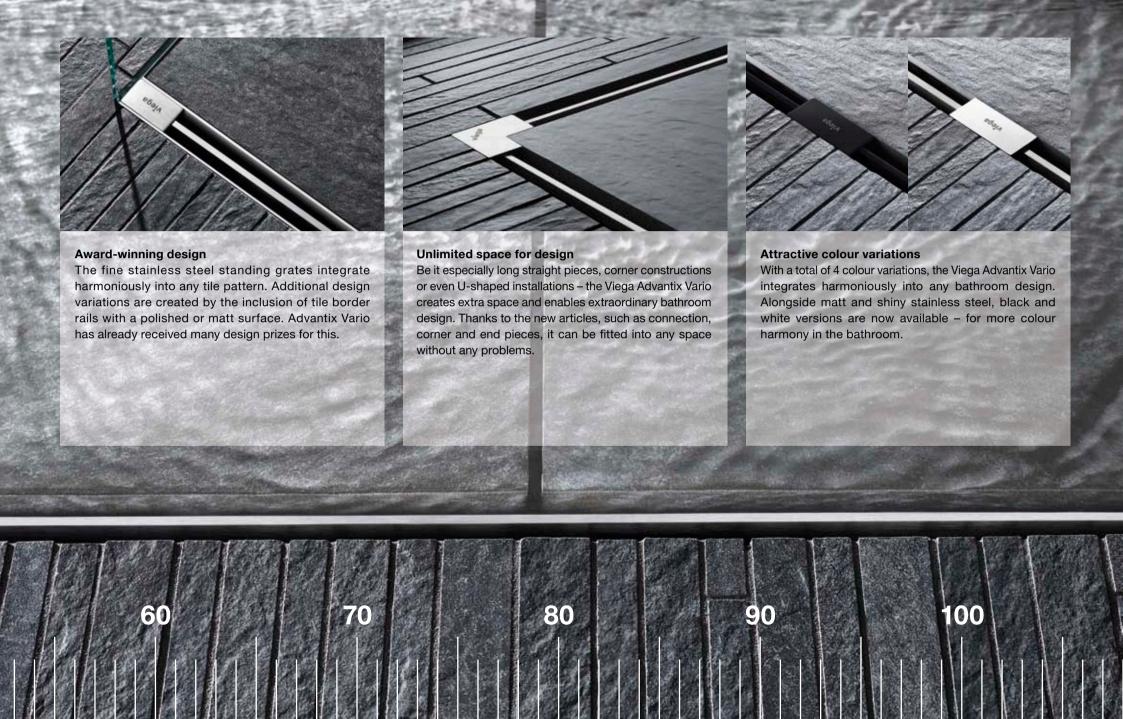



Advantix standing grate, 30-120 cm* Model 4965.30, 4965.31, 4965.32, 4965.33



Standing grate 20cm* Model 4965.60, 4965.61, 4965.62, 4965.63



Fine structure set connection piece* Model 4965.50



Fine structure set corner*/** Model 4965.5



Advantix Vario base unit Model 4965.10. Art-No. 668277



End piece Model 4965.16



Connection piece Model 4965.12



Connection piece corner Model 4965.14



Cleaning adaptor Model 4965.91



Extractor tool Model 4965.90

- A special 30 mm high accessory set can be ordered for natural stone floors.
- *All standing grates and fine structure sets are available in matt stainless steel, shiny stainless steel, black and white.
- **From a length of 120 cm or more, an additional standing grate 20 cm is required.



Champfer

Model 2043

Plumbing and heating systems



